

SEASIDE CASUAL

(47) Kingston Arm Chaise Folding Arm Kit rev. A

Parts List:

(2) Arm Assemblies

Hardware:

(4) 1/4" Nylon Nuts

Tools Required:

7/16 Socket or Wrench

4MM Allen Wrench (Included)


Assembly Instructions

Step One: Set Up

READ ENTIRE INSTRUCTIONS BEFORE BEGINNING! Carefully remove contents from box. Make sure that all parts and hardware are included.

Step Two: Removal of Connector Bolts

Remove the two connector bolts and flat washers, which are pre-installed, underneath the inside rails of the Kingston Chaise Chair (Right Picture). Repeat process on other side.

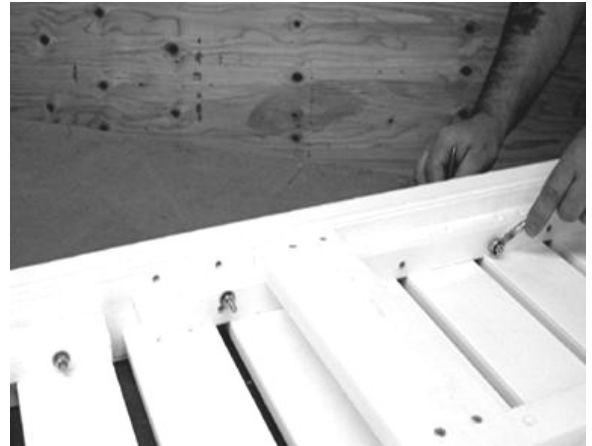

Step Three: Arm Kit Attachment



Flip Chair to standing position. Align the Right Arm Kit so the pre-drilled holes of the Swing Arm are aligned with the pre-drilled holes of the previous step. Arm Kit Swing Arms should be on the outside of the Chair. Attach using previously removed bolts and washers. Use (2) 1/4" Nylon Nuts in stead of previously removed nuts. Finger tighten bolts and nuts (Left Picture). Don not tighten at this time. Repeat process for Left Arm Kit.

Step Six: Tightening of Hardware

Tighten all connections to preferred tightness. To allow Arm Kits to swing tighten until the point desired. To allow Arm Kits to not swing and be in a secured position, tighten connections. **Do not over tighten!!! Over tightening of hardware can cause damage to the item.**